


Sisal Herringbone Supreme

Width	2 & 4 m
Manufacturing Process	Flat woven, loop pile
Pile Composition	100% Sisal
Backing	Latex
Total height	5 mm
Pile weight	1930 grm/m2
Resistance of heat conduction	Tog rating 1
Suitability	Domestic & commercial
Manufacturer Guarantee	5 years
Fire Resistance	Cfl-S1
Sound Insulation	18dB
Moth protection	Naturally moth resistant

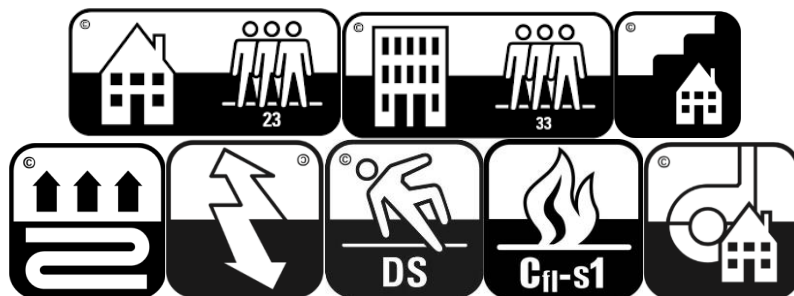

Care and Maintenance

It's important to note that natural plant and delicate fibre carpets are highly absorbent and should be used exclusively indoors, away from areas prone to excessive moisture, such as kitchens and bathrooms. Due to their absorbent nature, it is crucial to avoid wet shampooing or wet cleaning these carpets at all costs. If professional cleaning required, please request dry clean system. Samples should only be used as a guide to colour matching, slight colour variation possible.